

MAX15 Series

— High-Security U.L. Listed TL-15 Composite Safes —



Our **MAX15 SERIES COMPOSITE SAFES** have been awarded the U.L. TL-15 label after withstanding concentrated attacks by experienced U.L. experts using powerful tools, such as sledgehammers, power saws, carbide disc cutters and drills.

In addition to providing excellent burglary protection, **MAX15 SERIES SAFES** are built with several layers of composite materials for excellent fire resistance, ensuring your valuables are safe from intense fires.



MAX6528

FEATURES

DOOR

- Overall thickness of 6 $\frac{3}{4}$ " (4 $\frac{3}{4}$ " on MAX1014). Constructed with a 2 $\frac{1}{2}$ " (2" on MAX1014) defense barrier of outer and inner steel plates enclosing a unique, high-density fire and burglary resistant composite material
- Defense barrier houses a proprietary amalgam of nuggets and steel barriers to withstand concentrated attacks from the most sophisticated equipment used by burglars today
- Heavy-duty pull handle standard on all models

BODY

- Total protective thickness of 2 $\frac{3}{4}$ " (2 $\frac{13}{16}$ " on MAX1014) enclosing a high-density fire resistant composite material with nuggets and steel barriers
- A reinforced drill resistant door frame protects the door and each individual bolt chamber from severe side attacks
- A proprietary inner steel barrier protects against peeling attacks
- High-strength adjustable shelves with charcoal gray finish
- Equipped with a recessed 9/16" diameter anchor hole

FIRE ENDURANCE

- The body and door are specially designed with several layers of mixed materials for excellent fire resistance

LOCKING MECHANISM

- Four-way active boltwork mechanism engages the bolts horizontally and vertically into the body of the safe
- Equipped with 8 to 16 massive 1 $\frac{1}{2}$ " diameter (six 1 $\frac{1}{8}$ " diameter on MAX1014) polished stainless steel locking bolts. Each bolt moves deep into the body's protected bolt chambers

LOCKS

- Equipped with the AMSEC ESL10XL U.L. Listed Type 1 electronic lock. The lock is protected by an internal relock mechanism and a massive drill-shattering hardplate
- The lock and vital mechanism areas are also protected by a high-security tempered glass plate with two remotely placed spring-loaded relocking bolts
- In the event of an attack by tools or explosives, the glass will shatter, activating the highly sophisticated relock mechanism

HINGES

- Heavy-duty steel hinges provide smooth door operation

COLOR


- Charcoal gray textured finish

AMSEC MAX15 Series Specifications

Model	Inside Dimensions H x W x D	Outside Dimensions H x W x D	Cubic Feet	Weight Lbs.	Bolts	Shelves	Door Swing		
							A	B	C
MAX1014	10 ¹ / ₈ " x 14 ¹ / ₈ " x 11 ¹ / ₂ "	15 ⁷ / ₈ " x 19 ³ / ₄ " x 19 ³ / ₈ "	.95	485	6 (1 ¹ / ₈ ")	1	14 ¹ / ₈ "	36 ¹ / ₄ "	37 ¹ / ₄ "
MAX1814	18" x 14" x 12 ¹ / ₂ "	23 ¹ / ₂ " x 19 ¹ / ₂ " x 21 ⁷ / ₈ "	1.8	680	8 (1 ¹ / ₂ ")	1	14"	35 ¹ / ₂ "	39 ¹ / ₂ "
MAX2518	25" x 18" x 16"	30 ¹ / ₂ " x 23 ¹ / ₂ " x 25 ¹ / ₂ "	4.1	1064	10 (1 ¹ / ₂ ")	1	18"	43 ¹ / ₂ "	47 ¹ / ₈ "
MAX3820	38" x 20" x 16"	43 ¹ / ₂ " x 25 ¹ / ₂ " x 25 ¹ / ₂ "	7.0	1524	14 (1 ¹ / ₂ ")	2	20"	47 ¹ / ₂ "	49 ¹ / ₈ "
MAX5524	55" x 24" x 20 ³ / ₈ "	60 ¹ / ₂ " x 29 ¹ / ₂ " x 29 ⁷ / ₈ "	15.5	2446	16 (1 ¹ / ₂ ")	3	24"	55 ¹ / ₂ "	57 ¹ / ₂ "
MAX6528	65" x 28" x 20 ³ / ₈ "	70 ¹ / ₂ " x 33 ¹ / ₂ " x 29 ⁷ / ₈ "	21.4	3000	16 (1 ¹ / ₂ ")	4	28"	63 ¹ / ₂ "	61 ¹ / ₂ "



DOOR SWING PROJECTIONS

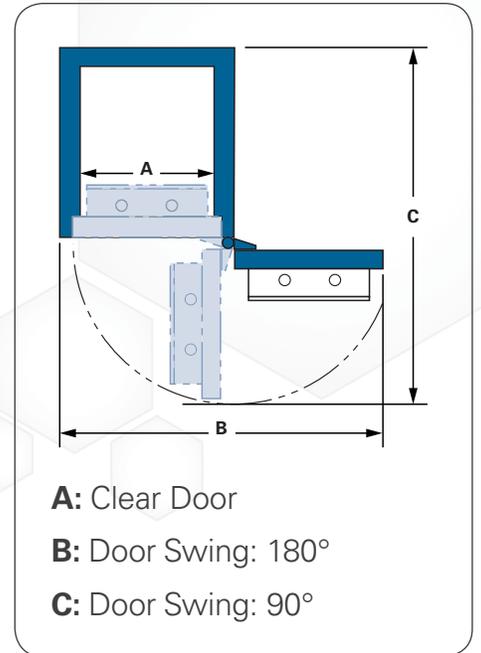

Features the AMSEC ESL10XL Electronic Lock



Lock Features:

- Easy operation
- Factory reset combination for resolving lost combinations without requiring expensive service calls
- Electronics are encapsulated within the lock and are sealed to prevent possible moisture-related failures
- Beep and flash from every keystroke gives maximum feedback to the user
- 15-Minute penalty lockout after four incorrect entries protects against manipulation attempts
- Patented dead-latched lock design with an internal relock device for maximum security
- Lock "auto-locks" when boltwork is thrown to prevent safes from being left open
- Slam bolt version for locker applications
- U.L. Type 1 listed



MAX5524



MAX3820



MAX1814